

RK Racing Chains have been the dominating factor for more FIM World Championship teams and AMA World Superbike/Super Sport Teams than any other chain in the past 20 years!

- Pre-stressed - for maximum performance
- Pre-stretched - for long life
- Applications for virtually all on & off-road applications



#### SPORTBIKE/STREET

All RK Sealed O-ring type chains feature heat treated hi-carbon alloy steel components with seamless rollers and shouldered bushings, and are fitted with a variety of O-ring seal designs. All RK O-ring seals are made from an advanced Nitrile Butadiene composite for maximum performance and wear life.

#### OFF-ROAD/MX

All RK Motocross chains utilize special heat treated hi-carbon steel components with solid rollers and bushings. All chains are pre-stressed and pre-stretched for maximum performance & wear life.

#### RK-M Chains offer you Japanese technology, steel and quality at Malaysian prices!

All RK-M Chains are solid roller design and are constructed in Malaysia under strict technical license from RK Excel Japan.

With RK-M there's no need to buy inferior Taiwanese products at higher costs.

RK-M is the chain of choice for OEM's like Honda, Kawasaki, Suzuki and Yamaha who have factories in Malaysia.

**RK-M Chains = Quality & Value at affordable prices.**



### RK CHAIN GUIDE CHART

	PIN LENGTH MM	PLATE THICKNESS INNER MM	PLATE THICKNESS OUTER MM	MAXIMUM WEAR LIFE **INDEX	TENSILE STRENGTH LBS/ PER FT	CLIP OR RIVET	WEIGHT LBS /100 LINKS	MAX cc STREET / OFF-ROAD
<b>STANDARD</b>								
415 RK-M	13.05	1.45	1.45	100	3,520	CLIP	1.47	50/50
420 RK-M	14.80	1.5	1.5	100	4,200	n/a	1.60	80/80
428 RK-M	16.85	1.5	1.5	100	4,500	n/a	1.85	125/80
520 RK-M	17.25	2.0	2.0	100	6,800	n/a	3.15	250/125
525 RK-M	18.70	2.0	2.0	100	6,800	n/a	3.38	300/NA
530 RK-M	20.45	2.0	2.0	100	6,800	n/a	3.60	350/NA
<b>HEAVY DUTY</b>								
GB415HR RS125 Race	13.65	1.45	1.5	300	4800	CLIP	1.51	125/NA
420MXZ & GB MX Race	15.70	1.8	1.45	300	5000	CLIP	1.76	150/125
428MXZ & GB MX Race	17.60	1.8	1.8	300	5800	CLIP	2.13	250/125
428 RK-M	18.75	2.0	2.0	200	5,400	n/a	2.26	200/125
520 RK-M	18.80	2.3	2.3	200	7,700	n/a	3.65	400/250
520KZ6 & GB MX Econo	18.15	2.0	2.0	200	7900	CLIP	3.15	600/250
520MXZ & GB MX Race	18.15	2.0	2.0	300	8800	CLIP	3.24	NA /500
525 RK-M	20.35	2.3	2.3	200	7,700	n/a	3.85	500/NA
530KS Street	20.85	2.0	2.0	200	8000	CLIP	3.75	600/NA
530 RK-M	22.00	2.3	2.3	200	7,700	n/a	4.09	500/NA
530DR Drag Racing	23.35	2.6	2.4	250	10400	CLIP	5.12	1500 Drag
<b>STANDARD O-Ring:</b>								
420SO Off-Road	17.05	1.45	1.45	400	4420	CLIP	1.72	125/125
428SO Off-Road	20.05	1.8	1.8	400	5500	CLIP	2.26	250/200
520SO Off-Road/ATV Econo	19.90	2.0	2.0	600	7700	CLIP	4.08	400/400
630SO Street	25.65	2.4	2.4	800	11100	RIVET	6.50	1300/NA
<b>PERFORMANCE RX-Ring:</b>								
520XS0 & GB Street & Sport	19.90	2.0	2.0	750	8500	CLIP	3.36	75/750
525XS0 & GB Street & Sport	22.85	2.4	2.3	750	8850	RIVET	4.30	900/750
530XS0 & GB Street & Sport	24.90	2.4	2.4	750	9200	RIVET	5.06	1000/750
<b>ULTRA XW-Ring:</b>								
520GXW & GB ATV & Offroad				1000	8500	CLIP	3.36	400/750
520GXW & GB Sport & Race	20.80	2.2	2.2	1000	8800	RIVET	3.75	1000/750
525GXW & GB Sport & Race	22.85	2.4	2.3	1000	9300	RIVET	4.30	1100/800
530GXW & GB Sport & Race	24.90	2.4	2.4	1000	10000	RIVET	4.63	1400/900
532GSV Sportbike	24.90	2.4	2.4	1000	9200	CLIP	4.92	1300/NA
630GSV Sportbike	25.00	2.4	2.4	1000	11300	RIVET	6.44	1400/NA

*New GB Gold = Bright Inner/Outer Plates.*

Specifications:

40 Series = 24.0 Links Per Foot. 12.7mm Pin to Pin center.

19.2 Links Per Foot. 15.875mm Pin to Pin center.

60 Series = 16.0 Links Per Foot. 19.05mm Pin to Pin center

- INDEX
- DEALER SUPPORT
- HELMETS
- MX APPAREL
- GOGGLES & SUNGLASSES
- MX/ATV ACCESSORIES
- HANDLEBARS GRIPS
- STREET ACCESSORIES
- STREET APPAREL
- CHAIN & SPROCKETS
- BRAKES & ROTORS
- CLUTCHES
- SUSPENSION
- MIRRORS
- MANUALS
- LUGGAGE
- CHEMICALS & LUBES
- MISC.
- TIE DOWNS & RAMPS
- SECURITY
- ELECTRICAL
- FILTERS
- INTAKE
- EXHAUST
- TIRE & WHEEL
- ORDER SHEET



**O - R I N G   T E C H N I C A L   S P E C I F I C A T I O N S**

**Standard O-ring :**

View diagram at right in closer detail to compare the lubrication provided by a standard O-ring and the superior lubrication provided by RK's RX- & XW-rings. You can see the difference!


**"RX"-ring Design & Features:**

RK's "RX-ring" chains feature an X-ring shaped seal. Viewed in cross-section, the "X-ring" has two lubrication pools and seal points versus the single seal point/pool design of a regular o-ring chain.

"RX-ring" technology offers less torsional friction, increased high-stress performance, and a **30% longer wear life** compared to standard o-ring chains. RK's new "RX-ring" chains offer tremendous value, plus true quality and performance for all but the most demanding high performance applications.

**"XW"-ring Design & Features:**

The "XW-ring" is made of an advanced Nitrile Butadiene composite and features three contact lips and two convex outer stabilizers. This means **three lubrication pools** to protect against high speed abrasion, extreme heat build up, torsional flex and loss of lubricant. Nitrile Butadiene composite is oil and contaminant resistant, and the "XW" seal design is compression and distortion resistant to provide the **ultimate** in efficiency and performance with **absolutely no o-ring drag**. The "XW-ring" provides the user with a **50% longer wear life** than basic o-ring chains.

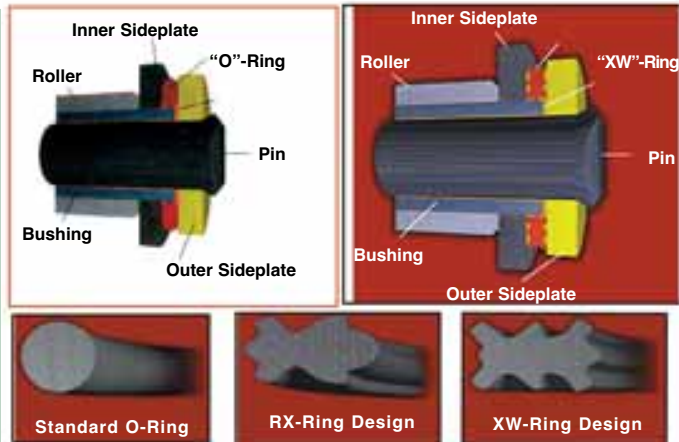

**415, 420 & 428 CHAIN**

**415 CHAIN**

**RK-M 415 Heavy Duty**

PART#	LENGTH	RTL
34-0360	110 Links	10.25

**GB415HR - Heavy Duty 125 Road Race Chain**

PART#	LENGTH	RTL
36-0370	120 Links	103.27
36-9003	Clip Link	2.47

**420SO Standard O-Ring**

PART#	LENGTH	RTL
36-1560	110 Links	59.43
36-1562	112 Links	60.53
36-1564	114 Links	61.60
36-1566	116 Links	62.70
36-1568	118 Links	63.78
36-1570	120 Links	64.87
36-1580	130 Links	70.28
36-1582	132 Links	71.37
36-1595	50' Roll	648.68
36-1597	100' Roll	1258.42
36-9015	Clip Link	2.57

**GB428MXZ GOLD**

**Heavy Duty MX Race Chain**

PART#	LENGTH	RTL
36-2460	110 Links	32.98
36-2466	116 Links	34.80
36-2468	118 Links	35.40
36-2470	120 Links	35.98
36-2474	124 Links	37.18
36-2480	130 Links	39.00
36-2482	132 Links	39.63
36-2484	134 Links	40.18
36-2495	50' Roll	359.83
36-2497	100' Roll	698.37
36-9024	Clip Link	2.03

**420 CHAIN**

**RK-M 420 Standard**

PART#	LENGTH	RTL
34-1140	90 Links	8.38
34-1156	106 Links	9.85
34-1160	110 Links	10.25
34-1166	116 Links	10.80
34-1168	118 Links	10.97
34-1170	120 Links	11.17
34-1176	126 Links	11.72
34-1180	130 Links	12.10
34-1182	132 Links	12.27
34-1195	50' Roll	111.57
34-1197	100' Roll	216.45
34-9011	Clip Links	0.63

**428 CHAIN**

**RK-M 428 Standard**

PART#	LENGTH	RTL
34-2160	110 Links	11.78
34-2162	112 Links	12.00
34-2164	114 Links	12.23
34-2166	116 Links	12.47
34-2168	118 Links	12.68
34-2170	120 Links	12.90
34-2176	126 Links	13.53
34-2180	130 Links	13.97
34-2182	132 Links	14.15
34-2195	50' Roll	128.95
34-2197	100' Roll	249.85
34-9021	Clip Links	0.72

**428SO Standard O-Ring**

(Formerly HO)

PART#	LENGTH	RTL
36-2550	100 Links	59.55
36-2552	102 Links	60.73
36-2554	104 Links	61.95
36-2556	106 Links	63.13
36-2558	108 Links	64.33
36-2560	110 Links	65.52
36-2562	112 Links	66.72
36-2564	114 Links	67.88
36-2566	116 Links	69.08
36-2568	118 Links	70.28
36-2570	120 Links	71.47
36-2572	122 Links	72.67
36-2574	124 Links	73.88
36-2576	126 Links	75.07
36-2578	128 Links	76.25
36-2580	130 Links	77.40
36-2582	132 Links	78.62
36-2584	134 Links	79.82
36-2586	136 Links	81.00
36-2593	25' Roll	357.35
36-2595	50' Roll	714.68
36-2597	100' Roll	1386.55
36-9025	Clip Link	3.55
36-9225	Rivet Link	4.57

**GB420MXZ GOLD**

**Heavy Duty MX Race Chain**

PART#	LENGTH	RTL
36-1460	110 Links	29.03
36-1464	114 Links	30.07
36-1466	116 Links	30.62
36-1468	118 Links	31.15
36-1470	120 Links	31.67
36-1474	124 Links	32.73
36-1476	126 Links	33.25
36-1480	130 Links	34.28
36-1482	132 Links	34.85
36-1495	50' Roll	316.63
36-1497	100' Roll	614.25
36-9014	Clip Link	1.58

**RK-M 428 Heavy Duty**

PART#	LENGTH	RTL
34-2352	102 Links	10.97
34-2358	108 Links	14.05
34-2360	110 Links	14.33
34-2364	114 Links	14.85
34-2366	116 Links	15.08
34-2368	118 Links	15.37
34-2370	120 Links	15.63
34-2372	122 Links	15.88
34-2374	124 Links	16.15
34-2376	126 Links	16.40
34-2380	130 Links	16.93
34-2382	132 Links	17.18
34-2395	50' Roll	156.25
34-2397	100' Roll	303.15
34-9023	Clip Links	0.72



INDEX

DEALER SUPPORT

HELMETS

MX APPAREL

GOGGLES & SUNGLASSES

MX/ATV ACCESSORIES

HANDLEBARS GRIPS

STREET ACCESSORIES

STREET APPAREL

CHAIN & SPROCKETS

BRAKES & ROTORS

CLUTCHES

SUSPENSION

MIRRORS

MANUALS

LUGGAGE

CHEMICALS & LUBES

MISC.

TIE DOWNS & RAMPS

SECURITY

ELECTRICAL

FILTERS

INTAKE

EXHAUST

TIRE & WHEEL

ORDER SHEET

### 520 CHAIN

Chains are also stocked in ROLLS and can be cut to ANY length!

CHAIN & SPROCKETS

#### 520 CHAIN

##### RK-M 520 Standard

PART#	LENGTH	RTL
34-3114	64 Links	12.27
34-3120	70 Links	13.43
34-3132	82 Links	15.72
34-3134	84 Links	16.12
34-3136	86 Links	16.50
34-3138	88 Links	16.88
34-3140	90 Links	17.27
34-3142	92 Links	17.63
34-3144	94 Links	18.05
34-3146	96 Links	18.40
34-3148	98 Links	18.82
34-3150	100 Links	19.17
34-3152	102 Links	19.57
34-3154	104 Links	19.95
34-3156	106 Links	20.33
34-3158	108 Links	20.72
34-3160	110 Links	21.08
34-3162	112 Links	21.50
34-3164	114 Links	21.85
34-3166	116 Links	22.27
34-3168	118 Links	22.63
34-3170	120 Links	23.02
34-3195	50' Roll	184.13
34-3197	100' Roll	357.23
34-9031	Clip Links	0.95

##### RK-M 520 Heavy Duty

PART#	LENGTH	RTL
34-3350	100 Links	22.68
34-3358	108 Links	24.50
34-3360	110 Links	24.95
34-3362	112 Links	25.42
34-3364	114 Links	25.87
34-3366	116 Links	26.33
34-3368	118 Links	26.78
34-3370	120 Links	27.23
34-3380	130 Links	29.48
34-3395	50 Links	217.78
34-3397	100 Links	422.53
34-9033	Clip Links	1.22

##### 520KZ (6) Heavy Duty MX Chain - Excellent Value!

PART#	LENGTH	RTL
36-3350	100 Links	37.50
36-3352	102 Links	38.25
36-3354	104 Links	39.00
36-3356	106 Links	39.75
36-3358	108 Links	40.50
36-3360	110 Links	41.27
36-3362	112 Links	42.00
36-3364	114 Links	42.75
36-3366	116 Links	43.50
36-3368	118 Links	44.27
36-3370	120 Links	44.98
36-3380	130 Links	48.73
36-3382	132 Links	49.48
36-3395	50' Roll	359.98
36-3397	100' Roll	698.37
36-9033	Clip Link	1.55
36-9233	Rivet Link	2.02

##### GB520KZ (6) GOLD Heavy Duty MX Chain

PART#	LENGTH	RTL
36-2950	100 Links	43.07
36-2954	104 Links	44.78
36-2960	110 Links	47.35
36-2962	112 Links	48.23
36-2964	114 Links	49.10
36-2966	116 Links	49.93
36-2968	118 Links	50.78
36-2970	120 Links	51.67
36-2997	100' Roll	801.83
36-9029	Clip Link	1.82

##### GB520MXZ (4) GOLD Heavy Duty MX Race

PART#	LENGTH	RTL
36-2760	110 Links	79.45
36-2762	112 Links	80.88
36-2764	114 Links	82.35
36-2766	116 Links	83.78
36-2768	118 Links	85.20
36-2770	120 Links	86.67
36-2795	50' Roll	693.32
36-2797	100' Roll	1345.03
36-9027	Clip Link	2.27

##### 520SO - Best Value in 520 O-ring!

PART#	LENGTH	RTL
36-3850	100 Links	49.63
36-3860	110 Links	54.63
36-3862	112 Links	55.58
36-3864	114 Links	56.58
36-3866	116 Links	57.60
36-3868	118 Links	58.58
36-3870	120 Links	59.55
36-3878	128 Links	63.52
36-3895	50' Roll	476.53
36-3897	100' Roll	924.47
36-9038	Clip Link	4.20

##### 520XSO High Performance RX-Ring

PART#	LENGTH	RTL
36-3532	82 Links	61.02
36-3534	84 Links	62.52
36-3536	86 Links	64.02
36-3538	88 Links	65.48
36-3540	90 Links	67.02
36-3542	92 Links	68.47
36-3544	94 Links	69.98
36-3546	96 Links	71.47
36-3548	98 Links	72.98
36-3550	100 Links	74.43
36-3552	102 Links	75.93
36-3554	104 Links	77.40
36-3556	106 Links	78.90
36-3558	108 Links	80.42
36-3560	110 Links	81.90
36-3562	112 Links	83.38
36-3564	114 Links	84.87
36-3566	116 Links	86.33
36-3568	118 Links	87.88
36-3570	120 Links	89.33
36-3572	122 Links	90.85
36-3574	124 Links	92.30
36-3576	126 Links	93.83
36-3578	128 Links	95.27
36-3580	130 Links	96.77
36-3582	132 Links	98.27
36-3590	140 Links	104.23
36-3591	150 Links	111.65
36-3595	50' Roll	714.65
36-3597	100' Roll	1386.40
36-9035	Clip Link	4.43
36-9235	Rivet Link	5.62

##### GB520XSO GOLD High Performance RX-Ring

PART#	LENGTH	RTL
36-8150	100 Links	85.55
36-8158	108 Links	92.37
36-8160	110 Links	94.12
36-8162	112 Links	95.82
36-8164	114 Links	97.52
36-8166	116 Links	99.23
36-8168	118 Links	100.97
36-8170	120 Links	102.67
36-8180	130 Links	111.22
36-8190	140 Links	119.78
36-8191	150 Links	128.33
36-8192	160 Links	136.88
36-8195	50' Roll	821.32
36-8197	100' Roll	1593.38
36-9081	Clip Link	5.10
36-9281	Rivet Link	6.45

##### GB520EXW GOLD Ultra High Performance ATV/Off-Road XW-Ring

PART#	LENGTH	RTL
36-8234	84 Links	71.87
36-8236	86 Links	73.58
36-8238	88 Links	75.27
36-8240	90 Links	77.00
36-8242	92 Links	78.70
36-8244	94 Links	80.42
36-8246	96 Links	82.13
36-8248	98 Links	83.82
36-8250	100 Links	85.55
36-8252	102 Links	87.25
36-8254	104 Links	88.97
36-8256	106 Links	90.68
36-8258	108 Links	92.40
36-8260	110 Links	94.12
36-8262	112 Links	95.82
36-8264	114 Links	97.52
36-8266	116 Links	99.23
36-8268	118 Links	100.95
36-8270	120 Links	102.67
36-8295	50' Roll	821.32
36-8297	100' Roll	1593.38
36-9082	Clip Link	5.10
36-9282	Rivet Link	6.45

##### GB520GXW - GOLD Ultra High-Performance Sport/Road Race XW-Ring

PART#	LENGTH	RTL
36-8350	100 Links	104.18
36-8360	110 Links	114.57
36-8362	112 Links	116.67
36-8364	114 Links	118.73
36-8366	116 Links	120.83
36-8368	118 Links	122.93
36-8370	120 Links	125.00
36-8380	130 Links	135.40
36-8390	140 Links	145.82
36-8391	150 Links	156.25
36-8392	160 Links	166.67
36-8395	50' Roll	999.98
36-8397	100' Roll	1939.97
36-9283	Rivet Link	9.45



INDEX  
DEALER SUPPORT  
HELMETS  
MX APPAREL  
GOGGLES & SUNGLASSES  
MX/ATV ACCESSORIES  
HANDLEBARS GRIPS  
STREET ACCESSORIES  
STREET APPAREL  
CHAIN & SPROCKETS  
BRAKES & ROTORS  
CLUTCHES  
SUSPENSION  
MIRRORS  
MANUALS  
LUGGAGE  
CHEMICALS & LUBES  
MISC.  
TIE DOWNS & RAMPS  
SECURITY  
ELECTRICAL  
FILTERS  
INTAKE  
EXHAUST  
TIRE & WHEEL  
ORDER SHEET

## 525 & 530 CHAIN

Chains are also stocked in ROLLS and can be cut to ANY length!

### 525 CHAIN

#### RK-M 525 Standard

PART#	LENGTH	RTL
34-4158	108 Links	20.98
34-4160	110 Links	21.38
34-4162	112 Links	21.78
34-4164	114 Links	22.13
34-4166	116 Links	22.57
34-4168	118 Links	22.95
34-4170	120 Links	23.33
34-4195	50' Roll	186.63
34-4197	100' Roll	362.17
34-9041	Clip Links	0.95

#### RK-M 525 Heavy Duty

PART#	LENGTH	RTL
34-4360	110 Links	25.23
34-4362	112 Links	25.73
34-4364	114 Links	26.18
34-4366	116 Links	26.62
34-4368	118 Links	27.08
34-4370	120 Links	27.55
34-4395	50' Roll	220.37
34-4397	100' Roll	427.45
34-9043	Clip Links	1.27

#### 525XSO High Performance

##### Street/Sport RX-Ring

PART#	LENGTH	RTL
36-4450	100 Links	99.42
36-4452	102 Links	101.38
36-4454	104 Links	103.38
36-4460	110 Links	109.35
36-4462	112 Links	111.37
36-4464	114 Links	113.32
36-4466	116 Links	115.33
36-4468	118 Links	117.32
36-4470	120 Links	119.30
36-4472	122 Links	121.30
36-4474	124 Links	123.23
36-4480	130 Links	129.23
36-4490	130 Links	129.23
36-4491	140 Links	139.17
36-4495	50' Roll	954.37
36-4497	100' Roll	1851.52
36-9044	Clip Link	4.30
36-9244	Rivet Link	5.55

#### GB525XSO - GOLD

##### High Performance Street/Sport Bike RX-Ring

PART#	LENGTH	RTL
36-8750	100 Links	114.30
36-8760	110 Links	125.75
36-8762	112 Links	128.03
36-8764	114 Links	130.32
36-8766	116 Links	132.58
36-8768	118 Links	134.90
36-8770	120 Links	137.18
36-8772	122 Links	139.43
36-8780	130 Links	148.58
36-8790	140 Links	160.03
36-8791	150 Links	171.47
36-8795	50' Roll	1097.33
36-8797	100' Roll	2128.80
36-9087	Clip Link	4.95
36-9287	Rivet Link	6.40

#### GB525GXW - GOLD

##### Ultra High Performance Sport/Road Race XW-Ring

PART#	LENGTH	RTL
36-8950	100 Links	156.10
36-8960	110 Links	171.73
36-8962	112 Links	174.83
36-8964	114 Links	177.97
36-8966	116 Links	181.08
36-8968	118 Links	184.22
36-8970	120 Links	187.33
36-8972	122 Links	190.43
36-8980	130 Links	202.93
36-8990	140 Links	218.57
36-8991	150 Links	234.17
36-8995	50' Roll	1498.65
36-8997	100' Roll	2907.38
36-9289	Rivet Link	9.85

### 530 CHAIN

#### RK-M 530 Standard

PART#	LENGTH	RTL
34-5142	92 Links	18.12
34-5144	94 Links	18.50
34-5148	98 Links	19.28
34-5150	100 Links	19.68
34-5152	102 Links	20.10
34-5154	104 Links	20.48
34-5156	106 Links	20.87
34-5158	108 Links	21.25
34-5160	110 Links	21.67
34-5162	112 Links	22.05
34-5164	114 Links	22.45
34-5166	116 Links	22.85
34-5168	118 Links	23.20
34-5170	120 Links	23.63
34-5174	124 Links	24.42
34-5195	50' Roll	188.95
34-5197	100' Roll	366.60
34-9051	Clip Links	0.95

#### RK-M 530 Heavy Duty

PART#	LENGTH	RTL
34-5348	98 Links	22.80
34-5350	100 Links	23.28
34-5352	102 Links	23.75
34-5354	104 Links	24.20
34-5356	106 Links	24.68
34-5358	108 Links	25.13
34-5360	110 Links	25.62
34-5362	112 Links	26.05
34-5364	114 Links	26.53
34-5366	116 Links	27.00
34-5368	118 Links	27.47
34-5370	120 Links	27.92
34-5395	50' Roll	223.42
34-5397	100' Roll	433.43
34-9053	Clip Links	1.30

#### 530DR - Heavy Duty

##### Drag Race (Non-Oring)

PART#	LENGTH	RTL
36-5260	110 Links	112.80
36-5270	120 Links	123.12
36-5280	130 Links	133.35
36-5290	140 Links	143.63
36-5291	150 Links	153.85
36-5292	160 Links	164.15
36-5293	170 Links	174.40
36-5297	100' Roll	1909.95
36-9052	Clip Link	3.80

#### 530XSO (Z1)

##### High Performance Street/Sport RX-Ring

PART#	LENGTH	RTL
36-5550	100 Links	99.42
36-5552	102 Links	101.38
36-5554	104 Links	103.38
36-5556	106 Links	105.37
36-5558	108 Links	107.33
36-5560	110 Links	109.35
36-5562	112 Links	111.37
36-5564	114 Links	113.32
36-5566	116 Links	115.33
36-5568	118 Links	117.30
36-5570	120 Links	119.30
36-5572	122 Links	121.28
36-5576	126 Links	125.27
36-5580	130 Links	129.22
36-5590	140 Links	139.20
36-5591	150 Links	149.13
36-5595	50' Roll	981.88
36-5597	100' Roll	1851.52
36-9055	Clip Link	4.30
36-9255	Rivet Link	5.55

#### GP530XSO

##### NICKEL PLATED!

##### High Performance Street/Sport RX-Ring

PART#	LENGTH	RTL
36-6050	100 Links	104.55
36-6052	102 Links	113.58
36-6054	104 Links	115.80
36-6056	106 Links	117.98
36-6058	108 Links	120.23
36-6060	110 Links	122.22
36-6062	112 Links	124.68
36-6064	114 Links	126.92
36-6066	116 Links	129.18
36-6068	118 Links	131.35
36-6070	120 Links	133.62
36-6080	130 Links	144.73
36-6095	50' Roll	1068.79
36-6097	100' Roll	2073.45
36-9060	Clip Link	4.88
36-9260	Rivet Link	4.88

#### GB530XSO (Z1) GOLD

##### High Performance

##### Street/Sport RX-Ring

PART#	LENGTH	RTL
36-8450	100 Links	114.30
36-8460	110 Links	125.75
36-8462	112 Links	128.03
36-8464	114 Links	130.32
36-8466	116 Links	132.58
36-8468	118 Links	134.90
36-8470	120 Links	137.18
36-8480	130 Links	148.62
36-8490	140 Links	160.03
36-8491	150 Links	171.47
36-8495	50' Roll	1097.33
36-8497	100' Roll	2128.80
36-9084	Clip Link	4.95
36-9284	Rivet Link	6.40

#### GB530GXW - GOLD

##### Ultra High Performance Sport/Road Race XW-Ring

PART#	LENGTH	RTL
36-8650	100 Links	176.82
36-8660	110 Links	194.53
36-8662	112 Links	198.03
36-8664	114 Links	201.58
36-8666	116 Links	205.13
36-8668	118 Links	208.65
36-8670	120 Links	212.20
36-8672	122 Links	215.73
36-8680	130 Links	229.88
36-8690	140 Links	247.55
36-8691	150 Links	265.27
36-8692	160 Links	282.95
36-8695	50' Roll	1697.58
36-8697	100' Roll	3293.27
36-9286	Rivet Link	9.85



CHAIN & SPROCKETS

INDEX

DEALER SUPPORT

HELMETS

MX APPAREL

GOGGLES & SUNGLASSES

MX/ATV ACCESSORIES

HANDLEBARS GRIPS

STREET ACCESSORIES

STREET APPAREL

CHAIN & SPROCKETS

BRAKES & ROTORS

CLUTCHES

SUSPENSION

MIRRORS

MANUALS

LUGGAGE

CHEMICALS & LUBES

MISC.

TIE DOWNS & RAMPS

SECURITY

ELECTRICAL

FILTERS

INTAKE

EXHAUST

TIRE & WHEEL

ORDER SHEET

### 532 & 630 CHAIN

Chains are also stocked in ROLLS and can be cut to ANY length!

#### 532 CHAIN

##### 532GSV

Ultra High Performance Sport Bike RX-Ring

PART#	LENGTH	RTL
36-6960	110 Links	234.62
36-6962	112 Links	238.88
36-6964	114 Links	243.12
36-6966	116 Links	247.40
36-6968	118 Links	251.63
36-6970	120 Links	255.92
36-6980	130 Links	277.25
36-6995	50' Roll	2047.33
36-6997	100' Roll	3971.78
36-9069	Clip Link	6.78
36-9269	Rivet Link	8.92

#### 630 CHAIN

##### 630SO

High Performance Street/Sport RX Ring

PART#	LENGTH	RTL
36-7536	86 Links	112.43
36-7538	88 Links	115.05
36-7540	90 Links	117.68
36-7542	92 Links	120.32
36-7544	94 Links	122.93
36-7546	96 Links	125.53
36-7548	98 Links	128.15
36-7550	100 Links	130.75
36-7552	102 Links	133.35
36-7554	104 Links	135.97
36-7556	106 Links	138.57
36-7560	110 Links	143.83
36-7562	112 Links	146.45
36-7564	114 Links	149.05
36-7566	116 Links	151.68
36-7568	118 Links	154.28
36-7570	120 Links	156.90
36-7595	100' Roll	1014.65
36-9275	Rivet Link	6.67
36-9075	Clip Link	5.15

##### 630GSV - Ultra

High-Performance Sport Bike RX-Ring

PART#	LENGTH	RTL
36-7740	90 Links	140.63
36-7742	92 Links	143.75
36-7744	94 Links	146.92
36-7746	96 Links	150.00
36-7748	98 Links	153.13
36-7750	100 Links	156.25
36-7760	110 Links	171.87
36-7770	120 Links	187.50
36-7795	100' Roll	1212.48
36-9077	Clip Link	6.42
36-9277	Rivet Link	8.43



#### RK Chain Tool Chain Breaker / Press Fit / Rivet Tool

- Cutting Pin made from SKH9 Tool Grade steel
- Durable Sure-Grip composite handle
- Includes compact hard storage case
- Lifetime warranty on tool body and handle
- Replacement parts available separately



*A must-have for installing and cutting today's high performance, close tolerance chains!*

PART#	DESCRIPTION	MFR#	RTL
36-9296	RK Chain Tool	UCT4060	109.99
36-9294	Repl. Pressure Bolt	PB4050	14.99
36-9297	Repl. Cutting Pin	CP4050	16.65
36-9298	Repl. Flare Pin	FP5060	9.98
36-9295	Repl. Pin Holder (bushing)	CP4050H	9.98

#### EMGO Heavy Duty Chain Breaker Works on all 420 thru 630 Chain.



**Great Value!**

PART#	DESCRIPTION	MFR#	RTL
61-3900	Chain Breaker	84-56420	29.98

#### EMGO Chain Riveting Tool Works on standard or O-Ring style chains.



PART#	DESCRIPTION	MFR#	RTL
61-3910	Chain Riveting Kit	84-56410	49.98